

Ethernet-APL Test Guide

Test Type (Data or Power): Power


Test Name: SP.2.3 Voltage Derivatives

Purpose/Description: To verify that a Spur Power Source port limits the output voltage slew rate during steady state operation. Minimum and Maximum Supply Voltage.

Required Test Equipment:

1. PSE Probe
2. DC Power Supply (To power the PSE Field Switch DUT)
3. Programmable DC Load
4. 4950 Channel Emulator
5. Test Automation Software

Test Setup / Connection Diagram:

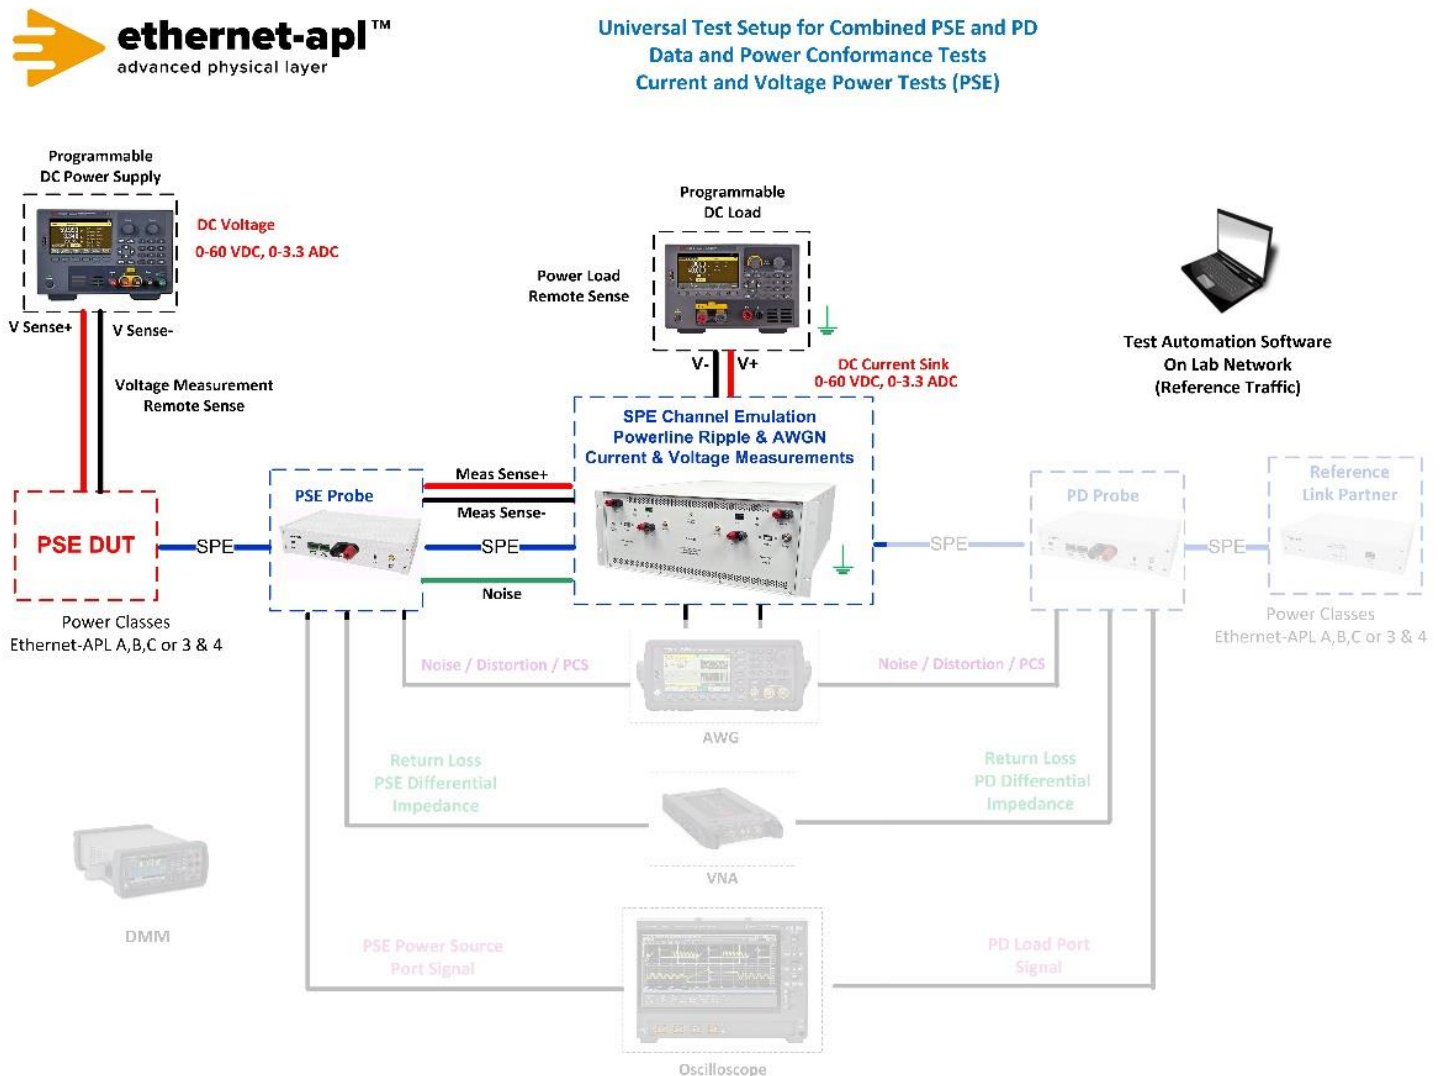

Ethernet-APL Test Guide

Device Under Test Setup:

- It is expected that all tests are performed with PHY communication abilities disabled. This is achieved by disabling Auto-Negotiation and setting the PHY to SLAVE mode. Regardless of the PHY state, each data line of the port under test shall be terminated with a 50 Ohm resistance behind a 1 μ F series capacitor in the Telebyte Probe.
- Enter the Power Class for the Device Under Test (Class A, B or C) into the test automation software.

Expected Results (Pass/Fail Criteria):

Step	Status	Description
6	PASS	All measurements of $dU_{CR/dt}$ are less than or equal to 0.1 V/ms
6	FAIL	At least one measurement of $dU_{CR/dt}$ is greater than 0.1 V/ms

Notes:

[1] APL Port Profile Draft 1.2 Section 5.4 575

[2] Ethernet-APL_Power_Test Specification_v1.2